EYP-DFB-0895-00050-1500-TOV01-0005

Revision 0.92

2025-04-04

SINGLE FREQUENCY LASER
DFB Laser

General Product Information

Product	Application
895 nm DFB Laser	Spectroscopy (Cs D1 line)
with hermetic 8-Pin TO Package (RoHS compliant)	Metrology
including Monitor Diode, Thermoelectric Cooler and Thermistor	

Absolute Maximum Ratings

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Storage Temperature	T_S	°C	-40		85	Stress in excess of one of the Absolute Maximum Ratings may damage the laser. Please note that a damaging optical power level may occur although the maximum current is not reached. These are stress ratings only, and functional operation at these or any other conditions beyond those indicated under Recommended Operational Conditions is not implied.
Operational Temperature at Case	T_C	°C	-20		75	
Operational Temperature at Chip	T_{chip}	°C	0		50	
Forward Current	I_F	mA			140	
Reverse Voltage	V_R	V			2	
Output Power	P_{opt}	mW			60	
TEC Current	I_{TEC}	A			1.0	
TEC Voltage	V_{TEC}	V			1.0	

Recommended Operational Conditions

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Operational Temperature at Case	T_{case}	°C	0		55	
Operational Temperature at Chip	T_{chip}	°C	15		45	measured by integrated Thermistor
Forward Current	I_F	mA			120	
Output Power	P_{opt}	mW	20		50	

© eagleyard Photonics GmbH
Rudower Chaussee 29 (IGZ)
This data sheet is subject to change without notice.

D-12489 Berlin
GERMANY
fon 49.30.6392.4520
www.toptica-eagleyard.com
info@toptica-eagleyard.com

EYP-DFB-0895-00050-1500-TOV01-0005

Revision 0.92

2025-04-04

SINGLE FREQUENCY LASER
DFB Laser

Characteristics Tchip = 25 °C at BOL

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Center Wavelength	λ_C	nm	893		896	
Target Wavelength	λ_T	nm		894.59		reached within Tchip = 0 ... 50 °C
Linewidth	$\Delta\lambda$	MHz		2		FWHM; Popt = 50 mW
Mode-hop free Tuning Range	$\Delta\lambda_{tune}$	pm	25			> 10 GHz, at target wavelength
Sidemode Suppression Ratio	SMSR	dB	30	45		Popt = 50 mW
Temp. Coefficient of Wavelength	$d\lambda$ / dT	nm/K		0.06		
Current Coefficient of Wavelength	$d\lambda$ / dI	nm/mA		0.003		
Laser Current	I_{LD}	mA			120	
Slope Efficiency	η	mW/mA	0.6	0.8	1.1	
Threshold Current	I_{th}	mA			70	
Divergence parallel	$\Theta_{\parallel}$	°		8		parallel to Pin 1 - Pin 6 plane (see p. 3)
Divergence perpendicular	$\Theta_{\perp}$	°		21		perpendicular to Pin 1 - Pin 6 plane (see p. 3)
Degree of Polarization	DOP	%		90		Popt = 50 mW; E field perpendicular to Pin 1 - 6 plane

Monitor Diode

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Monitor Detector Responsivity	I_{mon} / P_{of}	µA/mW		t.b.d.		at 5 V reverse voltage

Thermoelectric Cooler

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Current	I_{TEC}	A		0.4		Popt = 50 mW, ΔT = 20 K
Voltage	U_{TEC}	V		0.4		Popt = 50 mW, ΔT = 20 K
Power Dissipation (total loss at case)	P_{loss}	W		0.4		Popt = 50 mW, ΔT = 20 K
Temperature Difference	ΔT	K			40	Popt = 50 mW, ΔT = |Tcase - Tchip|

Thermistor (Standard NTC Type)

Parameter	Symbol	Unit	min	typ	max	Measurement Conditions / Comments
Resistance	R	kΩ		10		Tchip = 25 °C
Beta Coefficient	b			3952		$R_1/R_2 = e^{\beta(1/T_1 - 1/T_2)}$ at Tchip = 0 ... 50 °C
Steinhart & Hart Coefficient A	A			9.531×10^{-4}		$1/T = A + B(\ln R) + C(\ln R)^3$
Steinhart & Hart Coefficient B	B			2.644×10^{-4}		T: Temperature in Kelvin
Steinhart & Hart Coefficient C	C			-4.356×10^{-8}		R: resistance at T in Ω

© eagleyard Photonics GmbH
Rudower Chaussee 29 (IGZ)
This data sheet is subject to change without notice.

D-12489 Berlin
GERMANY
fon 49.30.6392.4520
www.toptica-eagleyard.com
info@toptica-eagleyard.com

EYP-DFB-0895-00050-1500-TOV01-0005

Revision 0.92

2025-04-04

SINGLE FREQUENCY LASER
DFB Laser

Pin Assignment

1	Laser Diode Anode	5	Thermistor
2	Laser Diode Cathode	6	Thermistor
3	Thermoelectric Cooler (-)	7	Photo Diode Anode
4	Thermoelectric Cooler (+)	8	Photo Diode Cathode

All 8 pins are isolated from case.

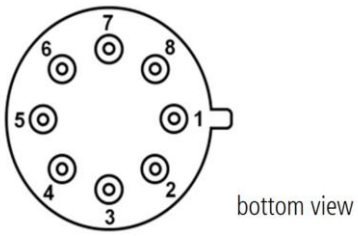

Package Drawings

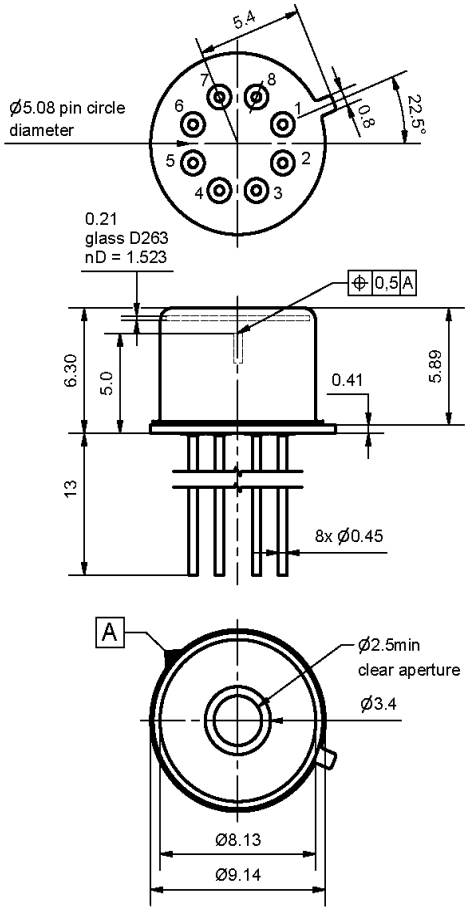



AIZ-19-0129-1426C

EYP-DFB-0895-00050-1500-TOV01-0005

Revision 0.92

2025-04-04

SINGLE FREQUENCY LASER
DFB Laser

Unpacking, Installation and Laser Safety

Unpacking the laser diodes should only be done at electrostatic safe workstations (EPA). Though protection against electro static discharge (ESD) is implemented in the laser package, charges may occur at surfaces. Please store this product in its original package at a dry, clean place until final use. During device installation, ESD protection has to be maintained.



IEC-60825-1

A laser diode is sensitive against optical feedback, so an optical isolator may be required in order to avoid any disturbance of the emission spectrum. Operating at moderate temperatures on proper heat sinks will contribute to a long lifetime of the diode.

Avoid direct and/or indirect exposure to the free running beam. Collimating and focussing the free running beam with optics as common in optical instruments will increase threat to the human eye.



Complies with 21 CFR 1040.10 and 1040.40

Each laser diode will come with an individual test protocol verifying the parameters given in this document.

Performance figures, data and any illustrative material provided in this specification are typical and must be specifically confirmed in writing by eagleyard Photonics before they become applicable to any particular order or contract. In accordance with the eagleyard Photonics policy of continuous improvement specifications may change without notice.

© eagleyard Photonics GmbH
Rudower Chaussee 29 (IGZ)
This data sheet is subject to change without notice.

D-12489 Berlin
GERMANY

fon 49.30.6392.4520

www.toptica-eagleyard.com
info@toptica-eagleyard.com